

Presence[®] Elite



Frameless Loudspeakers

PE-620f

6-1/2" In-Ceiling / Wall Loudspeaker

6-1/2" 2-way Loudspeaker

Frequency Response: 50Hz - 22kHz \pm 3 dB

Power Handling: 45 watts nom. 90 max.

Sensitivity: 86 dB 1 watt / 1 meter

Impedance: 8 ohms nominal

Tweeter: 1" pivoting silk dome tweeter

Cut-out dimensions: 7-1/4" dia. x 3-1/2" deep

Overall dimensions: 8-7/16" dia.

Sold and shipped in pairs

Features:

- Woven glass fiber woofer with butyl rubber surround
- High quality multi-order crossover
- Load balancing toggle mounting system
- Super slim 3mm all-weather frameless grille



for PE-620f



for PE-820f

Optional Pre-Construction Brackets & Vapor Domes

PE-820f

8" In-Ceiling / Wall Loudspeaker

8" 2-way Loudspeaker

Frequency Response: 45Hz - 22kHz \pm 3 dB

Power Handling: 55 watts nom. 110 max.

Sensitivity: 87dB 1 watt / 1 meter

Impedance: 8 ohms nominal

Tweeter: 1" pivoting silk dome tweeter

Cut-out dimensions: 8-5/8" dia. x 4" deep

Overall dimensions: 9-7/8" dia.

Sold and shipped in pairs



Side-View

Optional Square Frameless Grilles

MGS-6f for
PE-620f

MGS-8f for
PE-820f



Rev. C

OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com

Presence[®] Elite



Frameless Single-Point Loudspeakers



PE-622f

6-1/2" In-Ceiling / Wall Loudspeaker

6-1/2" 2-way Single-Point Stereo Loudspeaker

Frequency Response: 58Hz - 25kHz \pm 3 dB

Power Handling: 50 watts nom. 100 max combined

Sensitivity: 86 dB 1 watt / 1 meter

Impedance: 8 ohms nominal (per channel)

Tweeter: Dual 3/4" silk dome tweeters


Cut-out dimensions: 7-1/4" dia. x 3-3/4" deep

Overall dimensions: 8-7/16" dia.

Sold and shipped in individually

Features:

- One speaker combines both left and right channels
- Woven glass fiber woofer with butyl rubber surround
- Load balancing toggle mounting system
- Super slim 3mm all-weather frameless grille

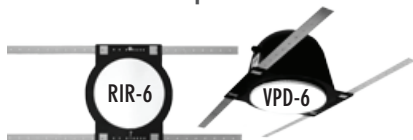

for PE-622f



for PE-822f

Optional Pre-Construction Brackets & Vapor Domes

PE-822f

8" In-Ceiling / Wall Loudspeaker

8" 2-way Single-Point Stereo Loudspeaker

Frequency Response: 50Hz - 25kHz \pm 3 dB

Power Handling: 60 watts nom. 120 max.

Sensitivity: 86dB 1 watt / 1 meter

Impedance: 8 ohms nominal (per channel)

Tweeter: Dual 3/4" silk dome tweeters

Cut-out dimensions: 8-5/8" dia. x 4" deep

Overall dimensions: 9-7/8" dia.

Sold and shipped individually



Side-View

Optional Square Frameless Grilles

MGS-6f for
PE-622f

MGS-8f for
PE-822f



Rev. C

OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com

Presence[®] Elite



15° Frameless Loudspeakers

PE-620LCRSf

6-1/2" In-Ceiling / Wall LCRS Loudspeaker



Specifications

Frequency Response: 55Hz - 22kHz \pm 3 dB

Power Handling: 45 watts nom. 90 max.

Sensitivity: 87dB 1 watt / 1 meter

Impedance: 6 ohms nominal

Tweeter: 1" pivoting silk dome tweeter


Cut-out dimensions: 8-5/8" Round x 4-3/16" Deep

Overall dimensions: 9-7/8" Round

Sold and Shipped Individually

Features:

- Woven glass fiber woofer with butyl rubber surround
- Super slim 3mm all-weather frameless grille
- Augmented dispersion design
- Ferro-fluid cooled tweeter
- Load balancing toggle mounting system
- High quality multi-order crossover

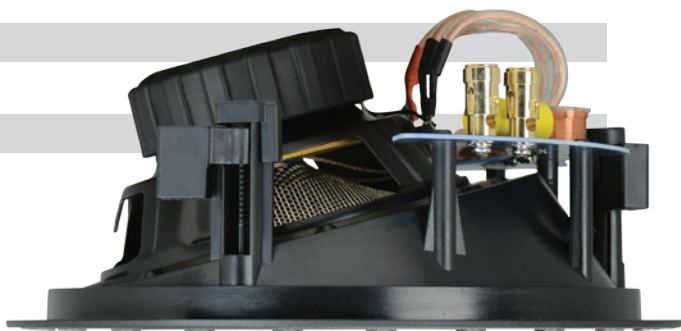


Optional Pre-Construction
Brackets & Vapor Domes



Optional Square Frameless Grilles

MGS-8f



Rev. C

OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com

Presence[®] *Elite*



Frameless Loudspeakers

PE-5LCRSf

Dual 5-1/4" 2-way In-Wall LCRS Loudspeaker

Specifications

Frequency Response: 55Hz - 20kHz \pm 3 dB

Power Handling: 50 watts nom. 100 max.

Sensitivity: 87dB 1 watt / 1 meter

Impedance: 6 ohms nominal

Tweeter: 1" pivoting silk dome tweeter


Cut-out dimensions: 7-15/16" W x 14-7/16" H x 3-1/4" Deep

Overall dimensions: 9" W x 15-3/4" H

Sold and Shipped Individually

Features:

- Woven glass fiber woofers with butyl rubber surrounds
- High temperature polyimide voice coils
- Super slim 3mm all-weather frameless grille
- Industry leading superior clamp-ring mounting system
- Orient Vertically or Horizontally
- Gold-plated high tension terminals fit up to 5-gauge wire
- High quality multi-order crossover

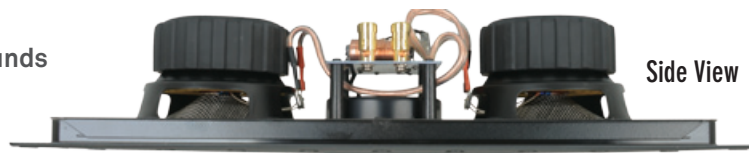

Side View


Optional Pre-Construction Bracket



Rev. C

OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com

Presence[®] *Elite*

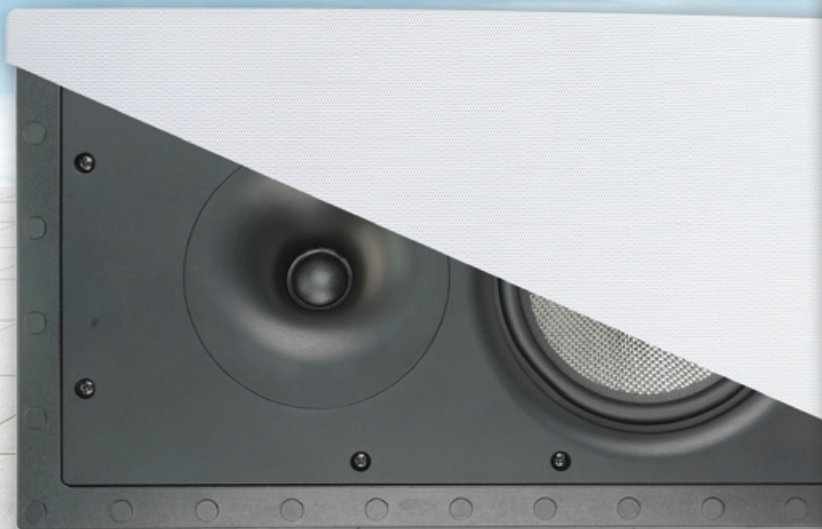

Frameless Loudspeakers

PE-W620LCRSf

Dual 6-1/2" 2-way In-Wall LCRS Loudspeaker

Specifications

Frequency Response: 50Hz - 21kHz \pm 3 dB

Power Handling: 50 watts nom. 100 max.

Sensitivity: 86dB 1 watt / 1 meter

Impedance: 6 ohms nominal

Tweeter: 1" Rotating silk dome tweeter

Cut-out dimensions: 7-15/16" W x 14-7/16" H x 3-5/8" Deep

Overall dimensions: 9" W x 15-3/4" H

Sold and Shipped Individually

Features:

- Woven glass fiber woofer with butyl rubber surround
- Rotating Waveguide with high efficiency silk dome tweeter
- High temperature polyimide voice coils
- Industry leading superior clamp-ring mounting system
- Super slim 3mm all-weather frameless grille
- Orient Vertically or Horizontally
- High quality multi-order crossover
- Gold-plated...



Side View

Optional Pre-Construction Bracket



Rev. C

OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com