



Frameless Loudspeakers

SE-LCRSf

Dual 5-1/4" 2-way In-Wall LCRS Loudspeaker

Specifications

Frequency Response: 45Hz - 20kHz \pm 3 dB

Power Handling: 50 watts nom. 100 max.

Sensitivity: 89dB 1 watt / 1 meter

Impedance: 8 ohms nominal

Tweeter: 1" pivoting silk soft dome tweeter


Cut-out dimensions: 7-15/16" W x 14-7/16" H x 3-1/4" Deep

Overall dimensions: 9" W x 15-3/4" H

Sold and Shipped Individually


Features:

- Woven Kevlar® woofers with butyl rubber surrounds
- Industry leading superior clamp-ring mounting system
- High temperature polyimide voice coils
- Magnetic, frameless, micro-perforated, vibration-free grille
- Phase plug pole piece extensions
- Orient Vertically or Horizontally
- 12 dB/octave crossover
- IR Knockouts

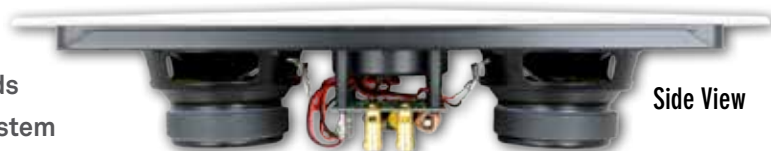

Side View

Optional Pre-Construction
Brackets & Vapor Domes



RIB-LCR

