

For Rough-In Kit Model: **RIB-LCR**


← When utilizing the bracket vertically slide it along the straps to achieve desired position. →  
 The straps have perforations running their length with one inch spacing.

The bracket has a series of 8 indexing holes per strap location allowing it to be indexed at 1/8" intervals, as the bracket slides along the straps note that with each 1/8" of travel one of the 8 indexing holes comes into alignment with one of the 1" spaced holes on the strap. Sheet metal screws are provided to fix the bracket in the desired location.

**Rectangular Brackets are furnished with straps 19" long.**

**Optional 36" long straps are available separately on a special order basis.**

**Model MS-36**

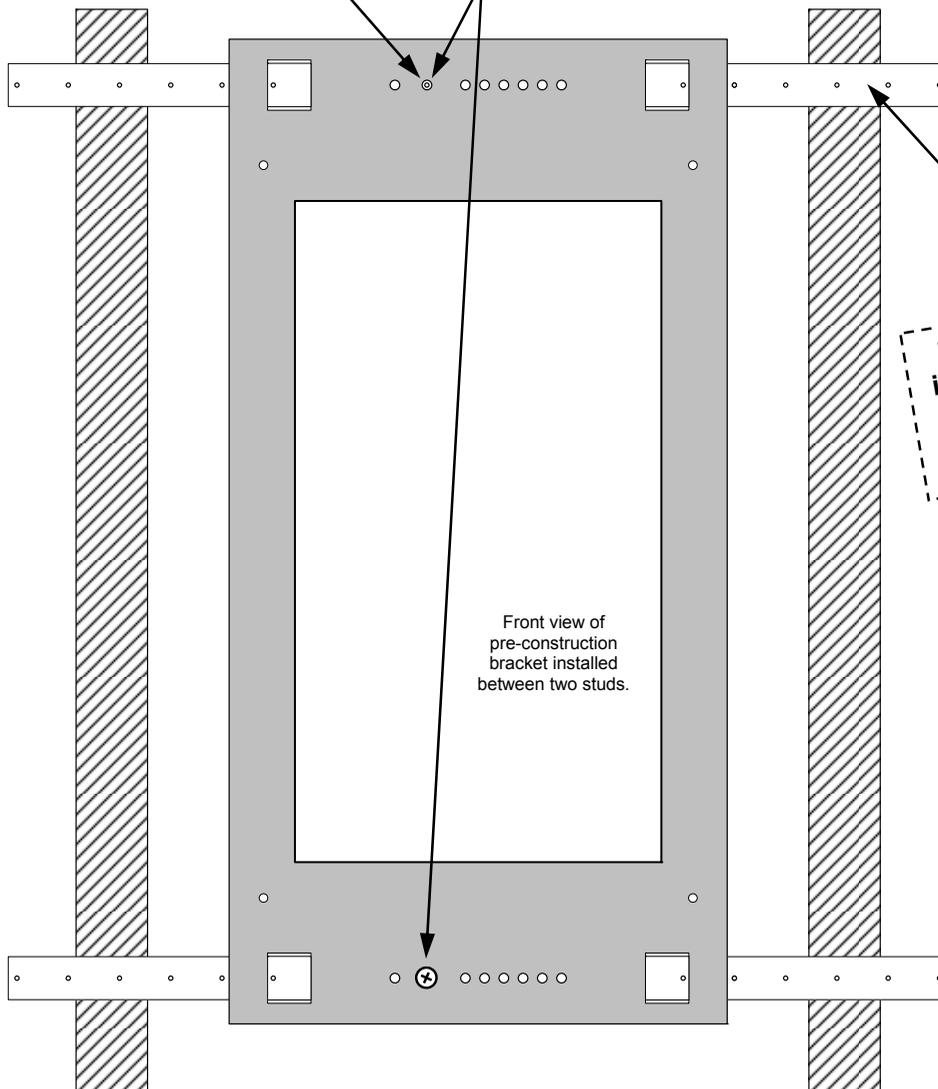

**Be certain to use a LEVEL when installing rectangular brackets on walls or the final installation will most likely suffer!**

Side view of pre-construction bracket.

