




**AW-100WV**

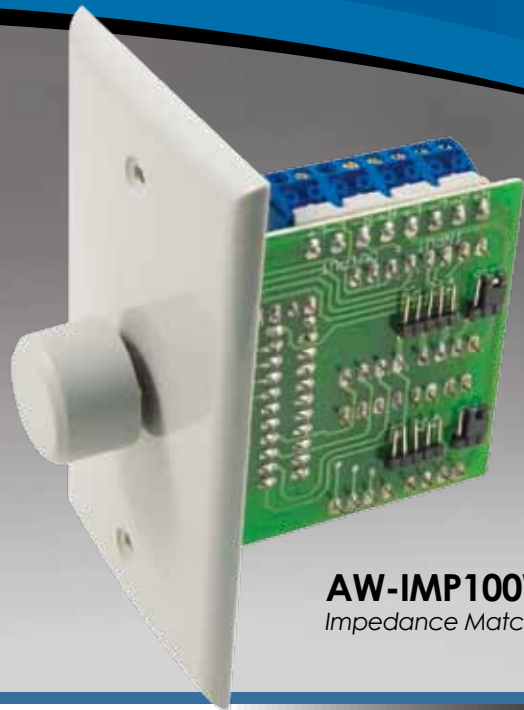

**AW-IMP100WV**  
*Impedance Matching*

The **AW-100WV** is a 100 watt outdoor in-wall volume control. The **AW-IMP100WV** impedance matching volume control is identical with the exception that it can be configured to maintain a safe system load when multiple controls and speakers are connected. These controls utilize autoformers to efficiently transfer the power from amplifier to speaker. Autoformers are the electrical equivalent to a gearbox in an automobile with each of the 12 volume positions a different gear. It is common to use these controls with outdoor landscape speakers.

## High Performance Outdoor Volume Controls

- Smooth transition between volume steps
- 12-tap, high-grade 100-watt autoformer
- 100 Watts Max Power Handling per channel
- 2-5/8" mounting depth
- Frequency Response: 20-20 kHz +/- 1dB
- Removable Input / Output terminal strip
- Stereo Control (Can be used in Mono Applications.)
- Suitable for residential & commercial applications
- Knob & Wallplate included
- Gray in color

### AW-100WV

Autoformer w/ Rotary 12 position switch

### AW-IMP-100WV

Impedance Matching Autoformer  
w/ Rotary 12 position switch

1X, 2X, 4X, 8X & 16X impedance multiplier

Protects amplifier by maintaining safe impedance

1X position allows use in ordinary applications

