



The AW-100WV-B is a 100 watt outdoor surface-mount volume control with enclosure. The AW-IMP100WV-B impedance matching volume control is identical with the exception that it can be configured to maintain a safe system load when multiple controls and speakers are connected. These controls utilize autoformers to efficiently transfer the power from amplifier to speaker. Autoformers are the electrical equivalent to a gearbox in an automobile with each of the 12 volume positions a different gear. It is common to use these controls with outdoor landscape speakers.

High Performance Outdoor Volume Controls w/ Box

Smooth transition between volume steps

12-tap, high-grade 100-watt autoformer

100 Watts Max Power Handling per channel

Frequency Response: 20-20 kHz +/- 1dB

New deeper box depth provides ample room for wiring

Overall box depth w/ cover plate 3-3/4" Internal depth 3-1/4"

Removable Input / Output terminal strip

Stereo Control (Can be used in Mono Applications.)

Suitable for residential & commercial applications

Knob, Box & Coverplate included

Gray in color

AW-100WV-B

Autoformer w/ Rotary 12 position switch

AW-IMP100WV-B


Impedance Matching Autoformer w/ Rotary 12 position switch

1X, 2X, 4X & 8X impedance multiplier

Protects amplifier by maintaining safe impedance

1X position allows use in ordinary applications

Easy access Impedance Switch

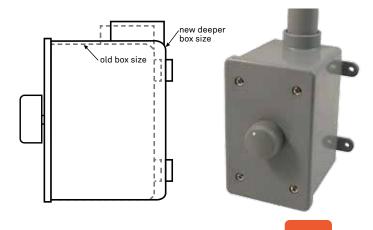



Rev. A

Rohs