

# Sound Terrain®

## SS-8M / SS-84

8" High-Performance Outdoor Speaker

Available in:

**Garden Green**

SS-8MG

SS-84G (Single Point Stereo)

**Desert Sand**

SS-8MS

SS-84S (Single Point Stereo)



**Specifications:**

<b>Woofer:</b>	8" polypropylene with butyl rubber surround
<b>Tweeter:</b>	<b>SS-8M:</b> 1" soft dome / <b>SS-84:</b> four 1/2" poly tweeters
<b>Impedance:</b>	<b>SS-8M:</b> 70V w/ 8-ohm position / <b>SS-84:</b> 8 ohms nominal
<b>Grille:</b>	Rust-proof stainless steel grille w/ integrated weather guard
<b>Power Handling:</b>	40 watts nom. 60 watts max.
<b>Sensitivity:</b>	N/A
<b>Frequency Response:</b>	55Hz - 20kHz
<b>Weight:</b>	Sold and shipped individually - <b>SS-8M:</b> 14 lbs / <b>SS-84:</b> 15 lbs
<b>Dimensions:</b>	Height: 14" / Base: 13" x 13" / Top: 13" round

**Mono version:**

- 70-volt transformer included, mounted internally with wattage taps of 16, 8, 4 & 2 watts + 8-ohm position
- Unit is shipped set at 8 ohms
- For commercial applications, 70-volt transformer setting is easily accessed with a flat-blade screwdriver (Image A)

**Single Point Stereo version:**

- One unit reproduces both left and right channels
- Dual voice coil 8" poly woofer with butyl rubber surround
- Separate left & right 1/2" poly tweeters

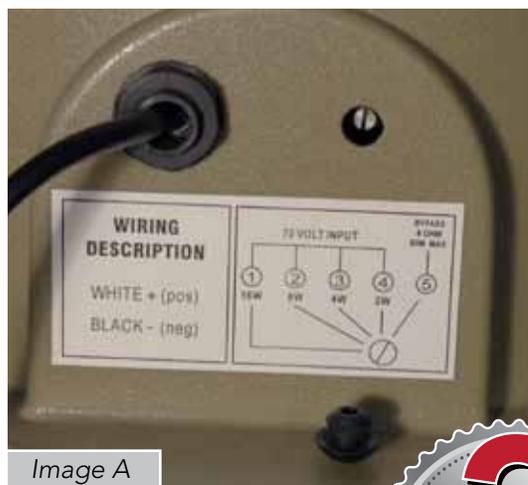



Image A



**SS-8M**

Single Channel Connection



**Single Channel** operation requires two speakers for stereo reproduction (one for left channel and one for right).

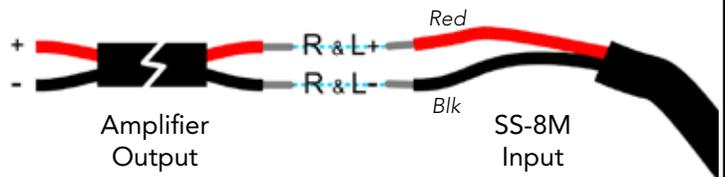

**SS-84**

Dual Channel (Stereo) Connection

**Dual Channel** operation requires only one speaker since both channels are combined within the speaker.

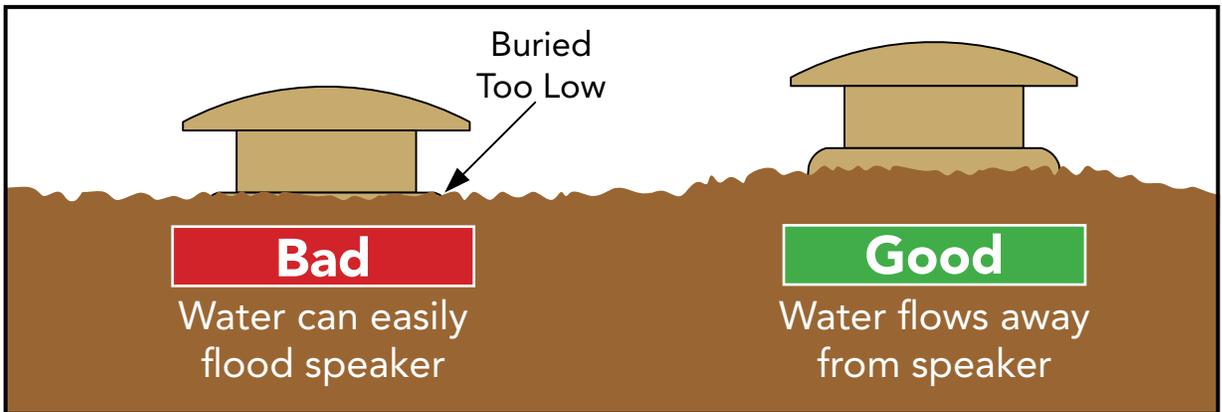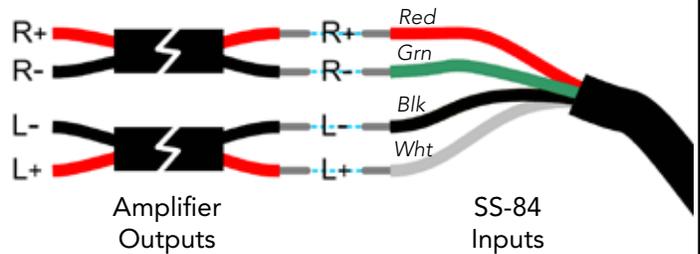

**Precautions:**

DO NOT bury the speaker so that the grille becomes partially covered. It is best to leave at least 1 inch of space between the top of the ground cover and the bottom of the grille.

Avoid placing the speakers where the grille will receive direct water spray.

